




## Rural Pathway suitable for light pedestrian use

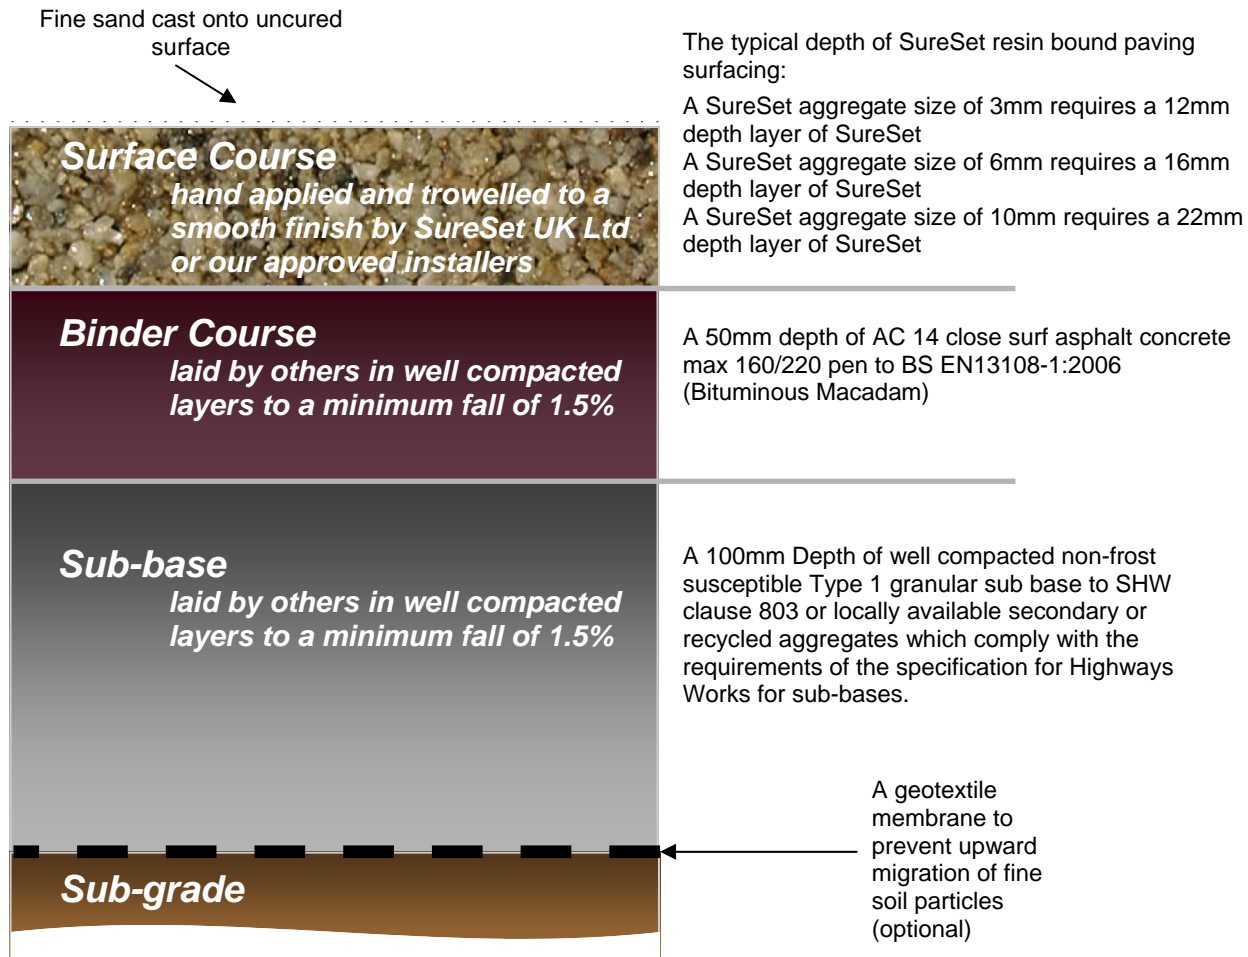

### Purpose

To Provide a seamless, flexible and hard wearing pathway

### Advantages

An attractive and durable surface that absorbs water and remains easy to clean

### Notes

SureSet can be overlaid onto existing asphalt or concrete surfaces of suitable construction for the traffic expected.  
 Movement joints in concrete should be extended up to the surface of the SureSet. Cracks should be broken out if necessary and filled with a polymer/polymer cement crack filling material.  
 Areas that may be trafficked by heavy vehicles should have structural layers designed according to Highways Agency requirements.  
 The maximum deviation of the base should not exceed 3mm under a 1 metre straight edge.  
 The thickness of the sub-base layer required is dependant on sub-grade soil conditions.  
 This specification is based on normal good practice for flexible surfacing and does not absolve the specifier from designing a construction suitable for the expected traffic and ground conditions pertaining on a given site.

# Rural Pathway



**if you have any  
enquiries call our  
technical sales team  
on:  
+44 (0) 1985 841180**



The details in this specification are intended only as a guide in specifying SureSet products, actual details should be developed by the project designers taking into account the specific circumstances of the intended application. SureSet assumes no responsibility for improper reliance upon or misuse of the data herein. Product design and specification are subject to change without further notice.